




YB-P32CS 机型设计特色

誉本牌P32压管机设计最大可以用于扣压2寸内径、4层钢丝液压油管。一体成型便于携带，可随时用于现场维修救援，使用直流电瓶12V或24V。

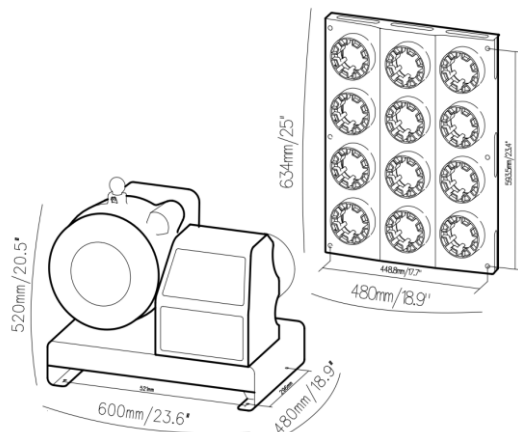

TECHNICAL DATA

Max crimping dia (mm)	10-87
Max crimping dia (inches)	0.39-3.42
Max. crimping force (kN)	2000
Max. crimping force (tonnage)	200
Cycle time 10 mm (s)	7.5
Hose size ID (inches)	2" (4SH) / 1 1/2" (6SH)
Dies set series	P32
Max. opening (mm)	+33
Max. opening without dies (mm)	132
Master die D / L (mm)	99/80
Master die D / L (inches)	3.90/3.15
Motor (kW) 12V/24V	1.6/2.25
Motor (HP) 12V/24V	2.1/3.05
Oil tank volume (L)	4
Crimping /hour	100

尺寸 (长X宽X高)

机器 (mm)	600X480X520
机器 (inch)	23.6X18.9X20.5
包装 (mm)	830X630X600
包装 (inch)	32.7X24.8X23.6

重量 (KG)

净重	143
毛重	178

控制方式

※半自动

标配

※快速换模手柄
※模具架 (挂式)

选配

※脚踏



模具 P32Dies:

编号	扣压范围	内径 (d)	长度(L)
P32/06*	6.0 - 8.0	6	55
P32/08*	8.0 - 10.0	8	55
P32/10*	10.0 - 12.0	10	55
P32/12*	12.0 - 14.0	12	55
P32/14*	14.0 - 16.0	14	55
P32/16	16.0 - 19.0	16	55
P32/19	19.0 - 22.0	19	55
P32/22	22.0 - 26.0	22	70
P32/26	26.0 - 30.0	26	70
P32/30	30.0 - 34.0	30	70
P32/34	34.0 - 39.0	34	75
P32/39	39.0 - 45.0	39	75
P32/45	45.0 - 51.0	45	90
P32/51	51.0 - 57.0	51	90
P32/57	57.0 - 63.0	57	100
P32/63	63.0 - 69.0	63	100
P32/69	69.0 - 75.0	69	100
P32/74*	74.0 - 80.0	74	100
P32/78*	78.0 - 87.0	78	100

*: 非标配模具

