




Guangzhou YuBen Hydraulic Technology Co., Ltd

Add:A5 Factory, Lanyuan Industrial Zone, No. 8 Xinwu Sixth Street,
Zhaidong Village, Yongning Street, Zengcheng District, Guangzhou

YB-P33 FEATURES

Yuben P33 hose-crimping machine has been designed to crimp up to 2" diameter 4-spiral hoses. Integrated design, reasonable operation height and control button position, With automatic crimping function, you can set up the max opening and the crimping holding time.

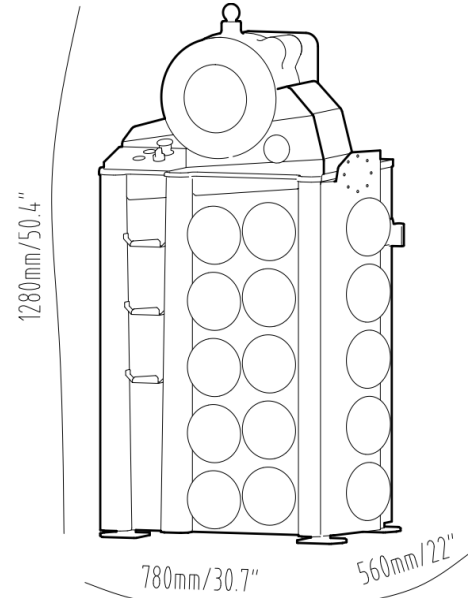

TECHNICAL DATA

Max crimping dia (mm)	10-87
Max crimping dia (inches)	0.39-3.42
Max. crimping force (kN)	2000
Max. crimping force (tonnage)	200
Cycle time 10 mm (s) Tri/Mono	3.3 / 5.5
Hose size ID (inches)	2 (4SH)
Dies set series	P32
Max. opening (mm)	+33
Max. opening without dies (mm)	132
Master die D / L (mm)	99/80
Master die D / L (inches)	3.90/3.15
Motor Tri/Mono (kW/HP)	3.7/5 4/5.3
Oil tank volume (L)	32
Crimping /hour	700/850
Motor Voltage(V) : Tri	200/220/380/440
Motor Voltage(V) : Mono	220/230/240

DIMENSIONS (L x W x H)

Machine (mm)	780X560X1280
Machine (inch)	30.71X22.05X50.39
Package (mm)	880X800X1420
Package (inch)	34.65X31.5X55.91

WEIGHT (KG)

N. W.	315
G.W.	350

STANDARD FEATURES

- ※QuickChange-tool
- ※Die racks
- ※Foot pedal

CONTROL

- ※Semi-Automatic
- ※Automatic

P32Dies:

DieSetNo	Crimping range ID (mm)	ID (mm)	L (mm)
P32/06*	6.0 - 8.0	6	55
P32/08*	8.0 - 10.0	8	55
P32/10*	10.0 - 12.0	10	55
P32/12*	12.0 - 14.0	12	55
P32/14	14.0 - 16.0	14	55
P32/16	16.0 - 19.0	16	55
P32/19	19.0 - 22.0	19	55
P32/22	22.0 - 26.0	22	70
P32/26	26.0 - 30.0	26	70
P32/30	30.0 - 34.0	30	70
P32/34	34.0 - 39.0	34	75
P32/39	39.0 - 45.0	39	75
P32/45	45.0 - 51.0	45	90
P32/51	51.0 - 57.0	51	90
P32/57	57.0 - 63.0	57	100
P32/63	63.0 - 69.0	63	100
P32/69	69.0 - 75.0	69	100
P32/74*	74.0 - 80.0	74	100
P32/78*	78.0 - 87.0	78	100

*: Non standard die

