



P16HP



P16HPZ



控制方式

手动

技术参数

扣压范围 (mm)	10-45
扣压范围 (inches)	0.39-1.77
扣压力 (kN)	955
扣压力 (tonnage)	95
10mm 行程用时 (s)	—
软管尺寸 内径 (inches)	1
模具	P16
最大开口 (mm)	+20
最大开口 (不含模具) (mm)	59
主模规格 D/L (mm)	39/64
主模规格 D/L (inches)	1.54/2.52

尺寸 (长X宽X高)

P16HP (mm)	330X450X291
P16HP (inch)	13X17.7X11.5
P16HPZ (mm)	150X250X380
P16HPZ (inch)	5.9X9.8X15
包装 (mm)	475X430X410
包装 (inch)	18.7X16.9X16.1


重量 (KG)

P16HP N.W.	26
P16HP G.W.	34
P16HPZ N.W.	24
P16HPZ G.W.	32

YB-P16HP/P16HPZ 机型设计特色



设计小巧轻便，可以携带至任何施工现场使用。P16HP为一体机型，P16HPZ为分体机型，两款都可用于现场维修及小型的机械维修中心。

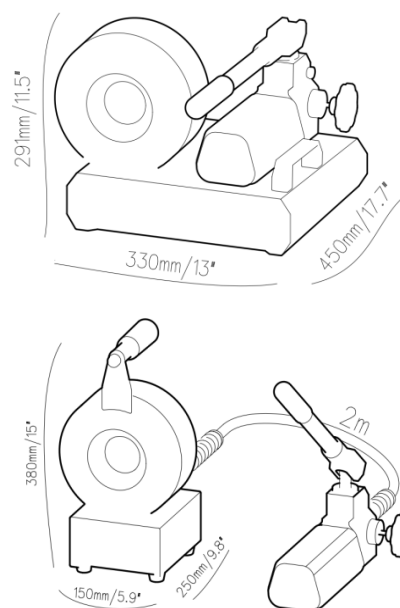

模具 P16Dies:

编号	扣压范围	内径 (d)	长度(L)
P16/06*	6.0 - 8.0	6	55
P16/08*	8.0 - 10.0	8	55
P16/10*	10.0 - 12.0	10	55
P16/12*	12.0 - 14.0	12	55
P16/14	14.0 - 16.0	14	55
P16/16	16.0 - 19.0	16	55
P16/19	19.0 - 23.0	19	55
P16/23	23.0 - 27.0	23	55
P16/27	27.0 - 31.0	27	65
P16/31	31.0 - 38.0	31	65

*: 非标配模具

