



# Guangzhou YuBen Hydraulic Technology Co., Ltd

Add:A5 Factory, Lanyuan Industrial Zone, No. 8 Xinwu Sixth Street,  
Zhaidong Village, Yongning Street, Zengcheng District, Guangzhou




## YB-P32E FEATURES



Yuben P32E hose-crimping machine has been designed to crimp up to 2" diameter 4-spiral hoses. The operating height is very ergonomic, fast and easy to use.

Perfect for workshop use.

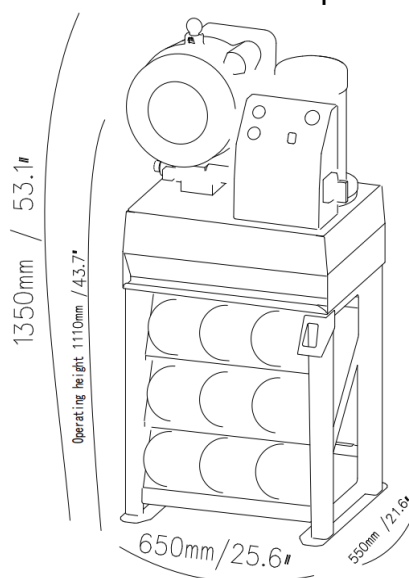

## TECHNICAL DATA

Max crimping dia (mm)	10-87
Max crimping dia (inches)	0.39-3.42
Max. crimping force (kN)	2000
Max. crimping force (Tonnage)	200
Cycle time 10 mm (s) Tri/Mono	3.3/5.5
Hose size ID (inches)	2
Dies set series	P32
Max. opening (mm)	+33
Max.opening without dies (mm)	132
Master die D / L (mm)	99/80
Master die D / L (inches)	3.90/3.15
Motor Tri/Mono (KW/HP)	3.7/5 2.2/2.95
Oil tank volume(L)	32
Crimping/hour	700/850
Motor Voltage (V): Tri	200/220/380/440
Motor Voltage (V): Mono	110/115/220/230/240

## DIMENSIONS (L x W x H)

Machine (mm)	650X550X1350
Machine (inch)	25.6X21.6X53.1
Package (mm)	925X765X890
Package (inch)	36.4X30.1X35.0

## WEIGHT (KG)

Machine N.W.	286
Machine G.W.	310

## STANDARD FEATURES

- ※ QuickChange-tool
- ※ Die racks
- ※ Foot pedal

## CONTROL

- ※ Semi-Automatic

## P32 Dies:

DieSetNo	Crimping range	ID (mm)	L (mm)
P32/06*	6.0-8.0	6	25
P32/08*	8.0-10.0	8	25
P32/10*	10.0-12.0	10	55
P32/12*	12.0-14.0	12	55
P32/14	14.0-16.0	14	55
P32/16	16.0-19.0	16	55
P32/19	19.0-22.0	19	55
P32/22	22.0-26.0	22	70
P32/26	26.0-30.0	26	70
P32/30	30.0-34.0	30	70
P32/34	34.0-39.0	34	75
P32/39	39.0-45.0	39	75
P32/45	45.0-51.0	45	90
P32/51	51.0- 57.0	51	90
P32/57	57.0-63.0	57	100
P32/63	63.0-69.0	63	100
P32/69*	69.0-75.0	69	100
P32/74*	74.0-80.0	74	100
P32/78*	78.0-87.0	78	100

\*: Non standard die

