




YB-P32S FEATURES



Yuben P32S hose-crimping machine has been designed to crimp up to 2" diameter 4-spiral hoses. And for workshop use. It is fast and easy to use.

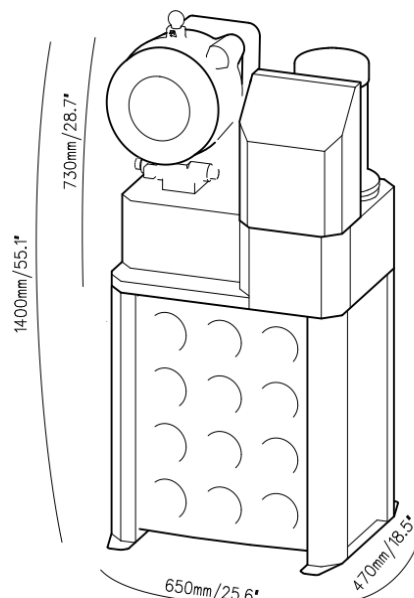

YB-P32S

TECHNICAL DATA

| | |
|--------------------------------|---------------------|
| Max crimping dia (mm) | 10-87 |
| Max crimping dia (inches) | 0.39-3.42 |
| Max. crimping force (kN) | 2000 |
| Max. crimping force (Tonnage) | 200 |
| Cycle time 10 mm (s) Tri/Mono | 3.3/5.5 |
| Hose size ID (inches) | 2 |
| Dies set series | P32 |
| Max. opening (mm) | +33 |
| Max. opening without dies (mm) | 132 |
| Master die D / L (mm) | 99/80 |
| Master die D / L (inches) | 3.90/3.15 |
| Motor Tri/Mono (KW/HP) | 3.7/5 2.2/2.95 |
| Oil tank volume(L) | 42 |
| Crimping/hour | 700/850 |
| Motor Voltage (V): Tri | 200/220/380/440 |
| Motor Voltage (V): Mono | 110/115/220/230/240 |

DIMENSIONS (L x W x H)

| | |
|----------------|----------------|
| Machine (mm) | 650X470X1400 |
| Machine (inch) | 25.6X18.5X55.1 |
| Package (mm) | 880X880X890 |
| Package (inch) | 34.6X34.6X35 |

WEIGHT (KG)

| | |
|-------|-----|
| N. W. | 305 |
| G. W. | 335 |

CONTROL

※Semi-Automatic

STANDARD FEATURES

- ※QuickChange-tool
- ※Die racks
- ※Foot pedal

P32Dies:

| DieSetNo | Crimping range | ID (mm) | L (mm) |
|----------|----------------|---------|--------|
| P32/06* | 6.0 - 8.0 | 6 | 55 |
| P32/08* | 8.0 - 10.0 | 8 | 55 |
| P32/10* | 10.0 - 12.0 | 10 | 55 |
| P32/12* | 12.0 - 14.0 | 12 | 55 |
| P32/14 | 14.0 - 16.0 | 14 | 55 |
| P32/16 | 16.0 - 19.0 | 16 | 55 |
| P32/19 | 19.0 - 22.0 | 19 | 55 |
| P32/22 | 22.0 - 26.0 | 22 | 70 |
| P32/26 | 26.0 - 30.0 | 26 | 70 |
| P32/30 | 30.0 - 34.0 | 30 | 70 |
| P32/34 | 34.0 - 39.0 | 34 | 75 |
| P32/39 | 39.0 - 45.0 | 39 | 75 |
| P32/45 | 45.0 - 51.0 | 45 | 90 |
| P32/51 | 51.0 - 57.0 | 51 | 90 |
| P32/57 | 57.0 - 63.0 | 57 | 100 |
| P32/63 | 63.0 - 69.0 | 63 | 100 |
| P32/69 | 69.0 - 75.0 | 69 | 100 |
| P32/74* | 74.0 - 80.0 | 74 | 100 |
| P32/78* | 78.0 - 87.0 | 78 | 100 |

*: Non standard die

