





YB-P20LHP FEATURES

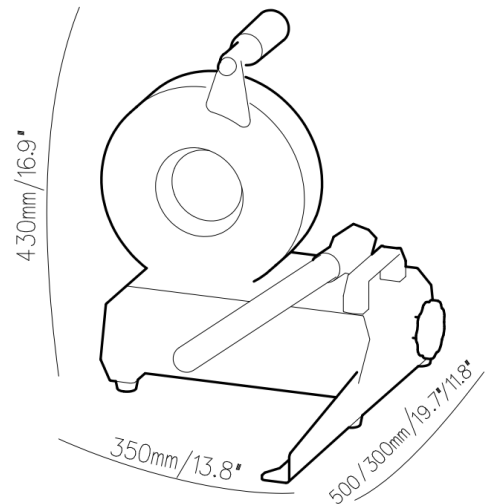

YB-P20LHP hose-crimping machine has been designed to crimp up to 1" diameter 4-spiral hoses. It is fast and easy to use. It is manually operated for repair and maintenance needs.

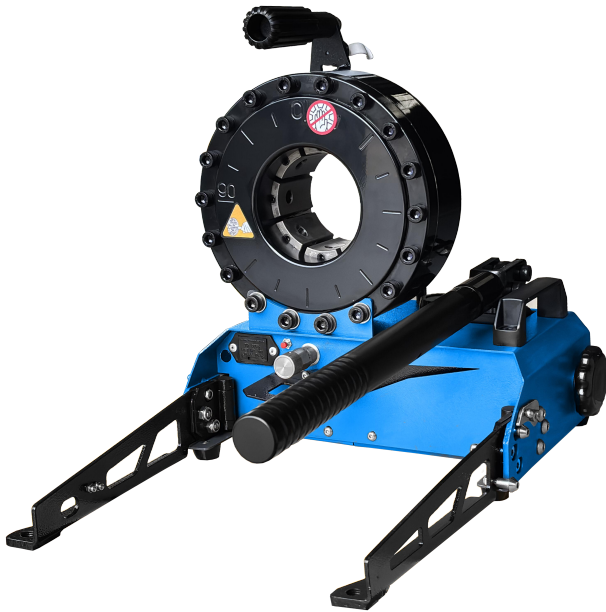

YB-P20LHP

TECHNICAL DATA

Max crimping dia (mm)	6-54
Max crimping dia (inches)	0.24-2.13
Max. crimping force (kN)	1850
Max. crimping force (Tonnage)	185
Cycle time 10 mm (s)	—
Hose size ID (inches)	1"4SP
Dies set series	P20
Max. opening (mm)	+10
Max. opening without dies (mm)	94
Master die D / L (mm)	84/66
Master die D / L (inches)	3.31/2.56
Motor Power (kW/HP)	—
Oil tank volume (L)	0.23

DIMENSIONS (L x W x H)

Machine (mm)	600X480X430
Machine (inch)	23.6X18.9X16.9
Package (mm)	625X505X510
Package (inch)	24.6X19.9X20.1

WEIGHT (KG)

Machine N.W.	35
Machine G.W.	45

P20LHP Dies:

DieSetNo	Crimping range	ID (mm)	L (mm)
P20/06*	6.0-14.0	6	40
P20/08*	8.0-16.0	8	40
P20/10*	10.0-18.0	10	40
P20/12*	12.0-20.0	12	40
P20/14	14.0-22.0	14	40
P20/16	16.0-24.0	16	40
P20/19	19.0-27.0	19	45
P20/23	23.0-31.0	23	50
P20/27	27.0-35.0	27	50
P20/31	31.0-39.0	31	60
P20/36	36.0-44.0	36	60
P20/41	41.0-49.0	41	65
P20/47*	47.0-54.0	47	65
P20/52*	52.0-60.0	52	65

*: Non standard die

