




# Guangzhou YuBen Hydraulic Technology Co., Ltd


Add: A5 Factory, Lanyuan Industrial Zone, No. 8 Xinwu Sixth Street,  
Zhaidong Village, Yongning Street, Zengcheng District, Guangzhou

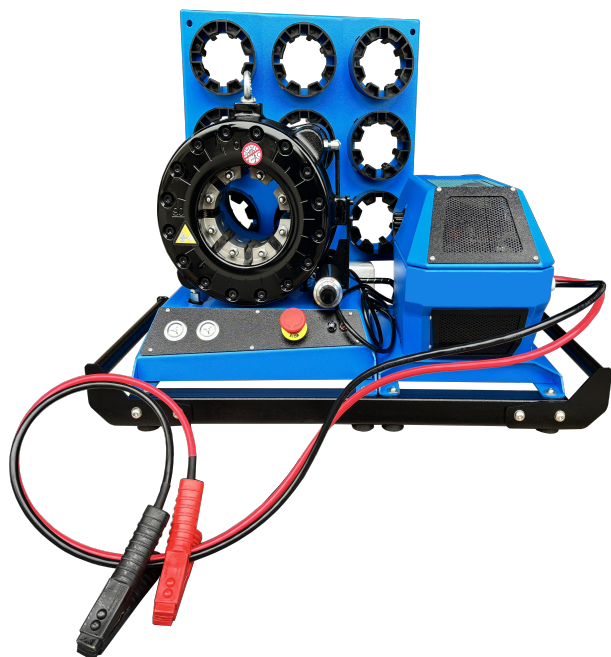

## YB-P32CSZ FEATURES



Yuben P32CSZ hose-crimping machine has been designed to crimp up to 2" diameter 4-spiral hoses. It is fast and easy to use. And for car-service use. It is fast and easy to use. CS machines are battery powered with 12V or 24V.

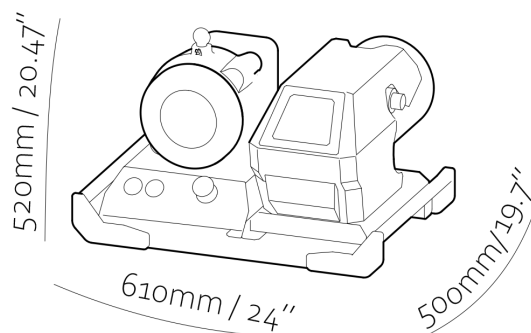

### TECHNICAL DATA

Max crimping dia (mm)	10-87
Max crimping dia (inches)	0.39-3.42
Max. crimping force (kN)	2000
Max. crimping force (tonnage)	200
Cycle time 10 mm (s)	7.5
Hose size ID (inches)	2" (4SH) / 1 1/2" (6SH)
Dies set series	P32
Max. opening (mm)	+33
Max. opening without dies (mm)	132
Master die D / L (mm)	99/80
Master die D / L (inches)	3.90/3.15
Motor (kW) 12V/24V	1.6/2.25
Motor (HP) 12V/24V	2.1/3.05
Oil tank volume (L)	4
Crimping /hour	100

### P32Dies:

DieSetNo	Crimping range	ID (mm)	L (mm)
P32/06*	6.0 - 8.0	6	55
P32/08*	8.0 - 10.0	8	55
P32/10*	10.0 - 12.0	10	55
P32/12*	12.0 - 14.0	12	55
P32/14*	14.0 - 16.0	14	55
P32/16	16.0 - 19.0	16	55
P32/19	19.0 - 22.0	19	55
P32/22	22.0 - 26.0	22	70
P32/26	26.0 - 30.0	26	70
P32/30	30.0 - 34.0	30	70
P32/34	34.0 - 39.0	34	75
P32/39	39.0 - 45.0	39	75
P32/45	45.0 - 51.0	45	90
P32/51	51.0 - 57.0	51	90
P32/57	57.0 - 63.0	57	100
P32/63	63.0 - 69.0	63	100
P32/69	69.0 - 75.0	69	100
P32/74*	74.0 - 80.0	74	100
P32/78*	78.0 - 87.0	78	100

\*: Non standard die

### DIMENSIONS(LxWxH)

Machine (mm)	610×500×520
Machine (inch)	24×19.7×20.47
Package (mm)	830×630×600
Package (inch)	32.7×24.8×23.6

### STANDARD FEATURES

- ✘ QuickChange-tool
- ✘ Die wall racks

### OPTIONS

- ✘ Foot pedal

### WEIGHT (KG)

N.W.	143
G.W.	178

### CONTROL

- ✘ Semi-Automatic

